

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/19468 A1(51) International Patent Classification⁷: A63B 69/36

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(21) International Application Number: PCT/FI00/00772

(22) International Filing Date:
14 September 2000 (14.09.2000)

(25) Filing Language: Finnish

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

(30) Priority Data:
19991962 16 September 1999 (16.09.1999) FI**Published:**

— With international search report.

— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.


(71) Applicant and
(72) Inventor: SUHONEN, Pentti, Olavi [FI/FI]; Naavakatu 15, FIN-15950 Lahti (FI).

(74) Agent: LAITINEN, Pauli, S.; Patentti-Laitinen OY, P.O. Box 29, FIN-02771 Espoo (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR TRAINING GOLF

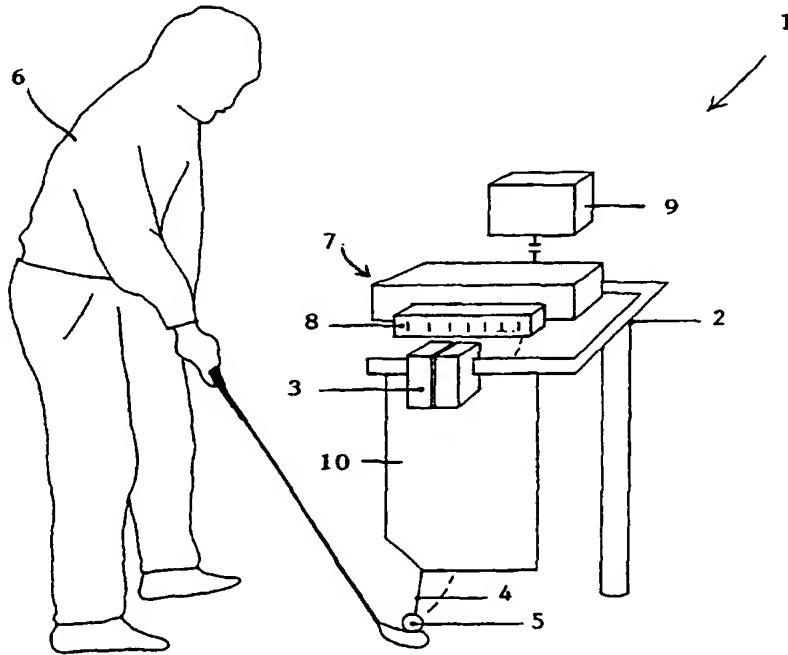

WO 01/19468 A1

(57) Abstract: A golf practice apparatus, in which the strokes of a ball (5) suspended in a frame construction (2) by means of a suspension device (4) are controlled by means of a buffer (7) located in the path of the ball. The apparatus includes devices (3, 8) for measuring the flight and direction of stroke of the ball. The position of the ball on a fairway shown on the display (9) of the apparatus is derived electronically from the results.